

NETZSCH

Proven Excellence.



NETZSCH *DeAerator* Vacuum Deaerator

Deaeration Technology for your Application

Business Unit
GRINDING & DISPERSING



Deaeration Technology for

Air and gas bubbles can lead to unwanted losses in the quality of liquids or pasty products, for example through the oxidation of reactive components. They can even contribute to oxidation by reactive components. With greases in particular, the lubricating film can tear, printing inks lose their gloss and coatings become inhomogeneous, porous and leaky.

But there is a solution: the NETZSCH Vacuum *DeAerator*, which continuously removes micronized gas bubbles from liquids of different viscosities.

The advantages of the NETZSCH Vacuum *DeAerator* are clear: deaerated products are generally more chemically stable and have a longer shelf life. The NETZSCH *DeAerator* effectively and reliably removes disruptive air and gas bubbles, allowing you to significantly improve the quality of your end products and achieve maximum product stability and reliability.

Rely on the NETZSCH Vacuum *DeAerator* and benefit from the following advantages::

- improved product quality: remove disruptive air and gas bubbles from your liquids to prevent loss of quality and achieve the highest standards.
- chemical stability: aeration of your product leads to better chemical stability and longer shelf life.
- homogeneous coatings: achieve a uniform, non-porous and dense coating for optimal appearance and improved functional properties.
- brilliant print results: your printing inks have a glossy sheen, resulting in impressive and appealing printed products
- smooth packaging processes: consistent product density avoids problems during packaging and ensures an efficient and trouble-free process.
- increased grinding efficiency: in bead mills, the grinding efficiency is significantly increased when deaerated products are used.

for your Application




The Operating Principle

With the NETZSCH Vacuum *DeAerator*, it is easy to continuously deaerate free-flowing products. Even micronized gas and air inclusions are removed from liquids of various viscosities or from viscous masses and pastes with this machine. The continuous mode of operation places high technical demands on the product feed and on the manifold with an outlet that is as leak-free as possible. The machines can be integrated into systems both in passage operation from interchangeable tanks and in inline operation. The possible throughput rates depend on the one hand on the size and on the other hand are strongly influenced by the product viscosity.

The underlying operating principle of the NETZSCH Vacuum *DeAerator* is the so-called Vacuum Thin film Rotation (VTR) principle.

- The product is drawn in by the vacuum in the deaeration chamber (1) and directed to the center of the rotating plate.
- The thin layer of product on the rotating deaeration plate (2) is continuously deaerated.
- Centrifugal force affects the discharge of the product through an outlet pipe (3).
- The residence time of the product within the deaeration chamber (and thus the throughput) is influenced by non-return flaps and valves (4).

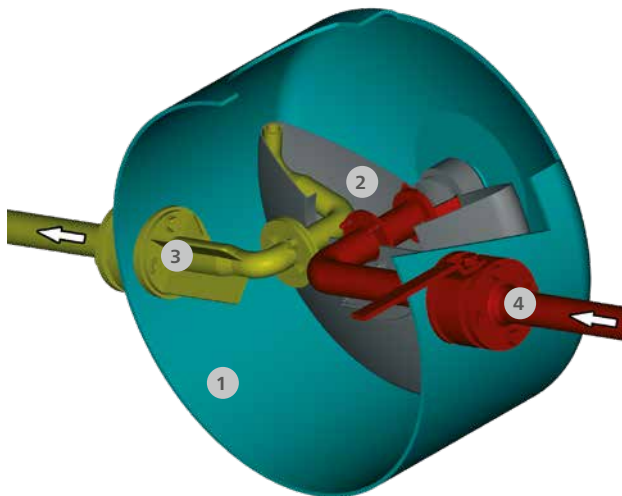

Advantages

- High throughput rates
- Flexible batch sizes
- Minimal product loss
- Fast, uncomplicated cleaning
- Low maintenance
- Simple operation
- Compact design
- Product-wetted parts made of stainless steel

Options

- Explosion-proof design
- All stainless-steel construction
- Level monitoring
- Integration into process sequences

AT A GLANCE

Machine Sizes

| Model | DeAERATOR Type DA 302 | DeAERATOR Type DA 602 |
|---|--------------------------|--------------------------|
| Height [mm] | approx. 1 500 | approx. 1 800 |
| Width [mm] | approx. 1 100 | approx. 1 300 |
| Depth [mm] | approx. 1 000 | approx. 1 400 |
| Drive power [kW] | 4.2 | 18.5 |
| Vacuum pump [kW] | 1.1 | 3 |
| Product flow rate [l/h] | approx. 200 - 2 000 | approx. 500 - 10 000 |
| Vacuum pump flow rate [m ³ /h] | 40 | 100 |

The machines can be used for the deaeration of small amounts of product from portable containers as well as for large batches in continuous operation.



DeAERATOR Type DA 302



DeAERATOR Type DA 602



EXAMPLES OF DIFFERENT APPLICATIONS

Industrial use of the Vacuum DeAerator


FOOD INDUSTRY

- Mustard
- Ketchup
- Chocolate pastes
- Spicy marinades
- Coffee extracts
- Soft cheeses
- Fruit juice concentrates
- Beverages
- Spreads


PHARMACEUTICAL & COSMETICS INDUSTRY

- Active ingredient patches
- Dental products
- Hospital foods
- Cosmetics
- Dishwashing products
- Soaps and shampoos

Product Examples



Flexo-ink before and after deaeration



Heat-set before and after deaeration



CHEMICALS INDUSTRY

- Coil coatings
- Printing inks
- Floor coatings
- Coatings for food packaging
- Pigment pastes
- Paper coatings
- Varnishes
- Sealants
- Adhesives
- Lubricants

AGRICULTURAL CHEMICALS

- Pesticides
 - Herbicides
 - Fungicides
 - Insecticides
- Liquid fertilizers
- Biologic products



Cosmetic cream before and after deaeration



Grease before and after deaeration

The owner-managed NETZSCH Group is a leading global technology company specializing in mechanical, plant and instrument engineering.

Under the management of Erich NETZSCH B.V. & Co. Holding KG, the company consists of the three business units Analyzing & Testing, Grinding & Dispersing and Pumps & Systems, which are geared towards specific industries and products. A worldwide sales and service network has guaranteed customer proximity and competent service since 1873.

Proven Excellence. ■

Business Unit Grinding & Dispersing – The World's Leading Grinding Technology

NETZSCH-Feinmahltechnik | Germany
NETZSCH Trockenmahltechnik | Germany
NETZSCH Vakumix | Germany
NETZSCH Lohnmahltechnik | Germany
NETZSCH Feinmahltechnik Polska | Poland
NETZSCH Mastermix | Great Britain
NETZSCH Broyage | France

NETZSCH España | Spain
NETZSCH Machinery and Instruments | China
NETZSCH India Grinding & Dispersing | India
NETZSCH Tula | Russia
NETZSCH Makine Sanayi ve Ticaret | Turkey
NETZSCH Premier Technologies | USA
NETZSCH Equipamentos de Moagem | Brazil

NETZSCH-Feinmahltechnik GmbH
Sedanstraße 70
95100 Selb
Deutschland
Tel.: +49 9287 797-0
Fax: +49 9287 797 149
info.nft@netzsch.com



NETZSCH®

www.netzsch.com