


**NETZSCH**

Proven Excellence.

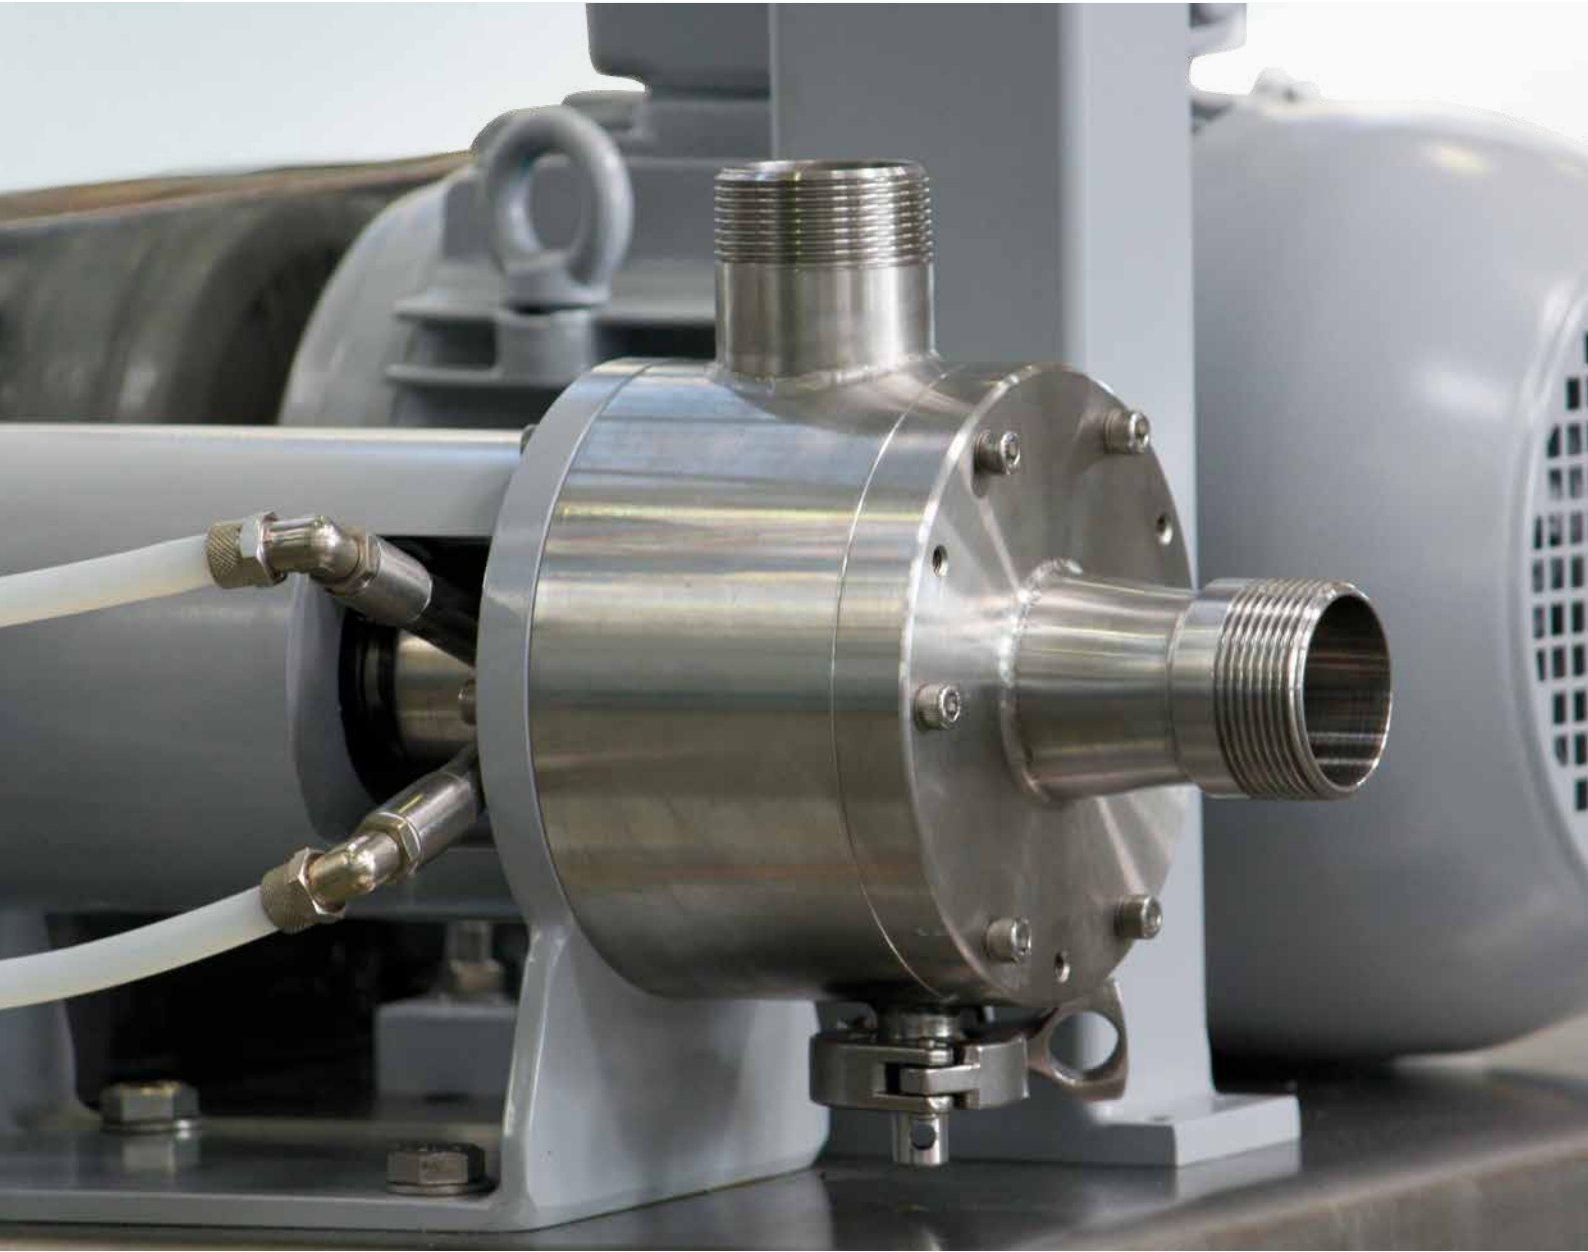

## Inline Disperser *MAXSHEAR*

Extreme High-Shear Performance

Business Unit  
GRINDING & DISPERSING

# Inline Dispenser *MAXSHEAR*

Premier *MAXSHEAR* Inline Dispenser is an efficient, low maintenance and low cost unit compact enough to be used at any point in your process. Its extreme high shear performance and powerful dispersing action generate the best premix possible. The *MAXSHEAR*'s unique single processing stage reduces downstream work and prevents the product bypassing the shearing process.


Applications for the *MAXSHEAR* are all kinds of industrial dispersions and emulsions such as color, paint, coating, dye, crop protection and other chemical products which need to be fine dispersed or emulsified.

## Benefits

- Efficient and reliable
- Compact enough to use at any point in your process
- Self pumping action allows for use as a low pressure transfer pump, making additional process equipment redundant
- Extreme high shear performance and powerful dispersing action generates better premixes, reducing work needed downstream
- Changeable stator, adaptable for different requirements, e. g. mixing, homogenizing, breaking granulates or beaded powders, emulsifying
- Low and simple maintenance



*MAXSHEAR 3*

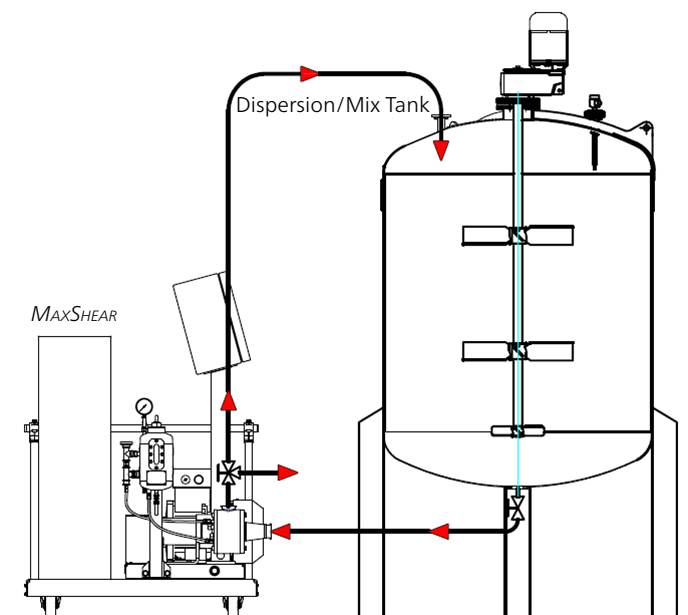

*MAXSHEAR* Process Diagram



### Possible Installations

- Combination with batch tank for circulation
- Combination with dissolver tank
- Combination with feeding pump for mid viscosity products
- Installation in existing pipe work

### Standard Features

- Stainless steel for product wetted parts
- Small chamber volume reduces product waste between batches
- Double acting mechanical seal with barrier system
- Interchangeable stator
- Compact design

### Available Options

- Unit mobility package: includes portable cart (stainless steel or painted) with push handle and casters
- Different stator types available
- Different connection types available, e. g. flanges, dairy fittings, tri clamp, pipe thread

## Technical Data

Rotor size [inches] / [mm]	No load speed		Approx. dimensions [inches] / [mm]		
	Motor [RPM]	Rotor [RPM]	width	length	height
3" / 76	3000	5400	21" / 530	27" / 690	12" / 310
4" / 102	3000	3800	21" / 530	27" / 690	13" / 330
6" / 152	3000	2600	24" / 610	32" / 810	15" / 380
8" / 203	3000	2000	26" / 660	36" / 910	17" / 430

Rotor size [inches] / [mm]	[HP] / [kW]	Inlet port [inches] / [mm]	Outlet port [inches] / [mm]
3" / 76	5 / 4	1 1/2" / 32 FPT	1 1/2" / 38 FPT
4" / 102	10 / 7.5	2" / 50 FPT	2" / 51 FPT
6" / 152	15 / 11	2 1/2" / 65 FPT	2 1/2" / 64 FPT
8" / 203	20 / 15	3" / 80 FPT	3" / 67 FPT

The owner-managed NETZSCH Group is a leading global technology company specializing in mechanical, plant and instrument engineering.

Under the management of Erich NETZSCH B.V. & Co. Holding KG, the company consists of the three business units Analyzing & Testing, Grinding & Dispersing and Pumps & Systems, which are geared towards specific industries and products. A worldwide sales and service network has guaranteed customer proximity and competent service since 1873.

# Proven Excellence.

## Business Unit Grinding & Dispersing – The World’s Leading Grinding Technology

NETZSCH-Feinmahltechnik | Germany  
NETZSCH Trockenmahltechnik | Germany  
NETZSCH Vakumix | Germany  
NETZSCH Lohnmahltechnik | Germany  
NETZSCH Feinmahltechnik Polska | Poland  
NETZSCH Mastermix | Great Britain  
NETZSCH Broyage | France

NETZSCH España | Spain  
NETZSCH Machinery and Instruments | China  
NETZSCH India Grinding & Dispersing | India  
NETZSCH Tula | Russia  
NETZSCH Makine Sanayi ve Ticaret | Turkey  
NETZSCH Premier Technologies | USA  
NETZSCH Equipamentos de Moagem | Brazil

NETZSCH-Feinmahltechnik GmbH  
Sedanstraße 70  
95100 Selb  
Germany  
Tel.: +49 9287 797 0  
Fax: +49 9287 797 149  
info.nft@netsch.com



**NETZSCH**®

[www.netsch.com](http://www.netsch.com)